


STI Wireless Receivers

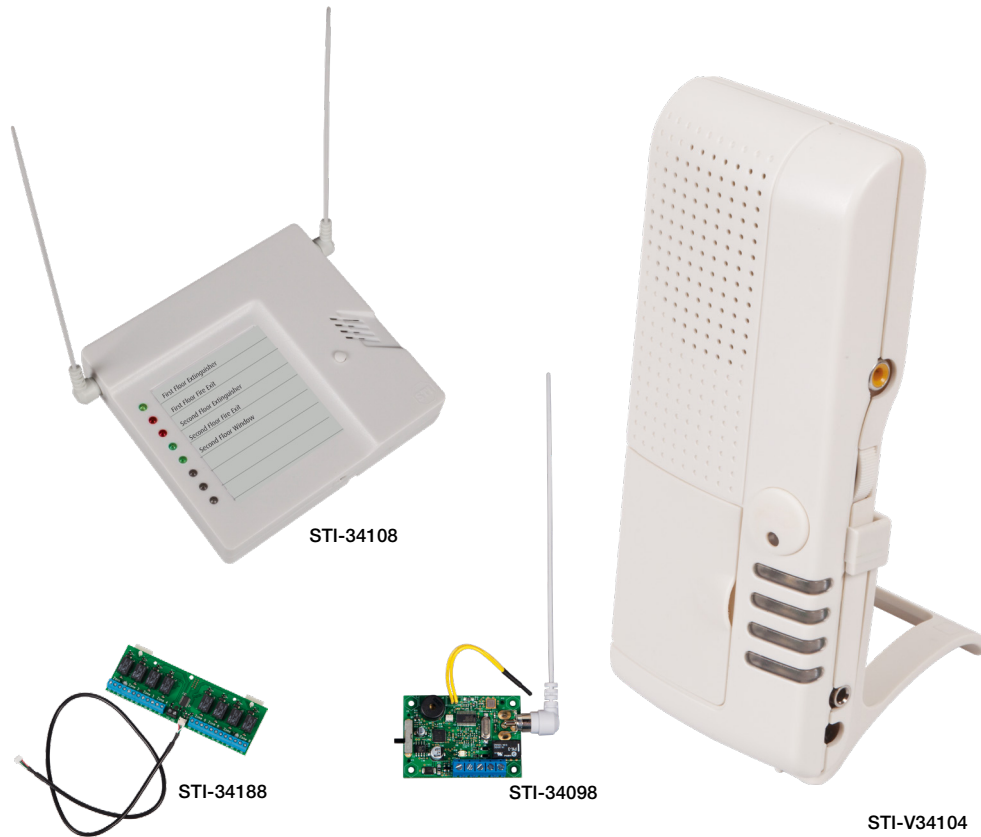

KEY FEATURES

General Information

- Wirelessly monitor 4 or 8 devices from a single location.
- Supervised for low battery and signal reception.

Installation

- Easy installation.

Electronics

- Operate up to 1000' (line of sight), 433 MHz
- Audible chime tone and 12 volt output.
- Devices can be latching or momentary by each zone (STI-V34104 or STI-34108).
- Includes 12 volt power supply.

Options

STI-V34104

- Monitors up to 4 devices.
- Ten tones/tunes or 53 selectable words (English or Spanish).
- Words can be programmed in sets of up to four to create custom message.

STI-34108

- Monitors up to 8 devices with 8 zone LED indicators.
- Mirror function (works with up to 4 additional 8-Channel Receivers).
- Dual antennas for increased signal strength.
- Form "C" contact for remote monitoring.
- 300mA, 12 volt available for siren output (with 500mA, 12 volt supply).
- Measures 5¼ x 5¾ x 1¼" (133 x 178 x 32mm).
- Key fob available for alert or on/off.

STI-34098

- Allows transmitters to connect to control panel.
- Measures: 2¼ H x 1½ W x ½" D (57 x 38 x 13mm).

STI-34188

- 8-Zone Relay Board for STI-34108.
- 8 momentary Form "C" relay contacts rated 3A, 125 VAC, 3A 28VDC.
- Measures: 5 7/8 H x 2 W x ½" D (150 x 51 x 13mm).

PRODUCT OVERVIEW

The receivers allow you to monitor up to 8 different STI wireless alert devices at a single, convenient location. Supervised for low battery and signal reception, they have an audible chime tone or 12 VDC output for siren. The 4-Channel Voice Receiver sounds a tune or a prerecorded programmable voice message. Offers ten tones/tunes or 53 selectable words (English or Spanish) to create a custom message up to four words. The 8-Channel Receiver offers a mirror function that can work with up to four additional 8-Channel Receivers. Devices can be latching or momentary by zone. STI offers multiple wireless products designed to alert you of several different conditions (such as: an open garage door, mail delivered, a car in the driveway, open exit door, removed fire extinguisher or activated push button, etc.).

HOW IT WORKS

The receivers (excludes Single Channel Slave) supervise transmitter battery and signal reception (low battery is indicated with a short beep between 12 and 24 hours of detection).

STI Wireless Receivers

Dimensions and Technical Information

MODELS AVAILABLE

Receivers:

STI-34098	Single Channel Slave Receiver
STI-V34104	4-Channel Voice Receiver
STI-34108	8-Channel Receiver

Sensors:

STI-34201	Mailbox Alert Sensor
STI-34301	Garage Sentry Sensor
STI-34401	Universal Alert Sensor
STI-34601	Wireless Doorbell Button Sensor
STI-6200WIR	Wireless Fire Extinguisher Theft Stopper Sensor
STI-6400WIR	Wireless Exit Stopper Door Alarm Sensor
STI-6517B	Wireless Stopper Station Shield with Sound and Wireless Transmitter

4-Channel Voice Receiver Kits:

STI-V34200	Wireless Mailbox Alert with voice receiver
STI-V34300	Wireless Garage Sentry Alert with voice receiver
STI-V34400	Wireless Universal Alert with voice receiver
STI-V34500	Wireless Door Chime with voice receiver
STI-V34600	Wireless Doorbell Button Alert with voice receiver
STI-V6200WIR4	Wireless Theft Stopper with voice receiver
STI-V6400WIR4	Wireless Exit Stopper with voice receiver

Accessories:

STI-30105	Extended Antenna
STI-34099	Single Channel Slave Receiver Case
STI-34105	Voltamax 12 VDC (500 mA) Power Supply
STI-34106	Key Fob
STI-34109	Repeater
STI-34188	8-Zone Relay Board for STI-34108

APPROVALS & WARRANTY

Testing

STI-34108, STI-V34104

· FCC & IC Compliant



**Safety Technology
International**

Taylor House
34 Sherwood Road
Bromsgrove
Worcestershire
B60 3DR, England

Tel: +44 (0)1527 520 999
Fax: +44 (0)1527 501 999
info@sti-emea.com
www.sti-emea.com

2306 Airport Road
Waterford, Michigan
48327, USA

Tel: 248-673-9898
Fax: 248-673-1246
info@sti-usa.com
www.sti-usa.com